


► (RT) Standard Bayonet Type

RT-M05X05-L030-K02




- Max. operating temperature : -50 °C / +400 °C
Standard cable types : Fiber glass + fiber glass + braided wire
Sensor type : DIN/EN60751 Class "B" 1xPT-100
Protection tube material : Nickel coated brass

► Technical drawing

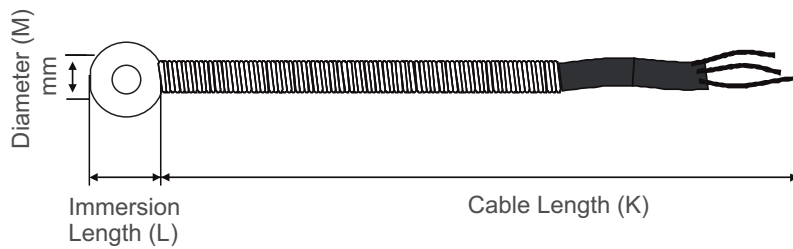

RT - M 0 5 x 0 5 - L 0 3 0 - K 0 2

PT-100 Connections



- Diameter (M) : 5x5 mm
Immersion Length (L) : 30 mm
Cable Length (K) : 2 meter