



DHC-96 mVdc

DHC-96 mVdc, digital millivoltmeter shunt measure, 96 x 48, 2 output relays

Code: M22348.

- > Protocol: Modbus/RTU
- > Scale: 60 mV / 75 mV / 100 mV / 150 mV / 200 mV
- > IP: 54
- > Communications: RS-485
- > N° relays: 2
- > Digital inputs: 2
- > Analog output: 1 (20 mA)
- > System: DC
- > Parameter: V dc
- > Mounting: Pannel
- > Modules: 96 x 48

Description

Panel-mounted digital instruments that display the value of an electrical variable measured or proportional value of a process signal on its screen (depending on the model). Designed to supervise, regulate and control units with the use of relay outputs that are built in the unit.

The **DHC-96** series displays the value of an electrical variable measured or proportional value of a process signal on its screen (depending on the model). The unit displays the electrical parameters of a single-phase installation, depending on the model, such as the voltage, current, etc. In DC systems, the unit can measure the voltage, current, frequency and other variables associated with industrial processes. The AC models take the measurements in true RMS (TRMS).

All models in this range have the following features:

- Universal power supply at 80...270 V_{ac/dc} (DHC-96-CPM: 100...270 Vac/dc) and optional power supply at 16 ... 36 V_{dc} (DHC-96-CPM: 20...60 Vdc)
- IP 54 protection degree on the front panel
- High measurement accuracy
- Programmable measuring input
- Alarm delays and interlockings
- Galvanic insulation between external circuits
- Self-configurable decimal point
- Installed on 96 x 49 mm panels

Application

These digital instruments have many different applications and can be used in:

- Industrial applications
- Air conditioning units
- Solar photovoltaic energy installations
- Industrial process control systems



DHC-96 mVdc

Panel-mounted digital instruments

Code: M22348.

Specifications

AC power supply

| | |
|-----------------------|----------------|
| Installation category | CAT III 300V |
| Consumption | 3.1 ... 5.4 VA |
| Frequency | 50/60 Hz |
| Nominal voltage | 80...270 V ~ |

DC power supply

| | |
|-----------------------|---------------|
| Installation category | CAT III 300 V |
| Consumption | 1.7 ... 1.8 W |
| Nominal voltage | 80...270 Vdc |

Mechanical characteristics

| | |
|-------------------------------------------|---------------------------------------------------------|
| Size (mm) width x height x depth | 96 x 49 x 89.2 (mm) |
| Envelope | Polycarbonate + ABS |
| Torque setting | Power supply and measurement: PZ1, Other terminals: PZ0 |
| Communications cable cross-section | $\leq 2.5 \text{ mm}^2$ |
| Cable gauge at power supply terminals | $\leq 1 \text{ mm}^2$ |
| Cable gauge at input and output terminals | $\leq 2.5 \text{ mm}^2$ |
| Cable gauge at current terminals | $\leq 1 \text{ mm}^2$ |
| Cable gauge at voltage terminals | $\leq 1 \text{ mm}^2$ |
| Weight (kg) | 0,2 |

Environmental characteristics

| | |
|------------------------------------------|-------------------------|
| Protection class | Front: IP54, Rear: IP20 |
| Relative humidity (without condensation) | $\leq 95 \%$ |
| Storage temperature | -40 ... +85 °C |
| Working temperature | -40 ... +70 °C |

Voltage measurement circuit

| | |
|---------------------------------------|-----------------------------------------------|
| Installation category | CAT III 300 V |
| Consumption | < 0.1 VA |
| Input impedance | > 1 M Ω |
| Nominal voltage | 60 mV / 75 mV / 100 mV / 150 mV / 200 mV (dc) |
| Maximum permanent measurement voltage | 1.2 Un continuous, 2 Un instantaneous (1 min) |

Communications

| | |
|--------------------|-----|
| Data bits | 8 |
| Stop bits (ModBus) | 1-2 |



DHC-96 mVdc

Panel-mounted digital instruments

Code: M22348.

| | |
|----------|----------------------|
| Parity | without, even, odd |
| Protocol | ModBus RTU |
| Speed | 2400-4800-9600-19200 |

Standards

| | |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Electrical safety, Maximum height (m) | 2000 |
| Electrical safety, Installation category | CAT III 300 V |
| Standards | IEC 61010-1, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11 |

User interface

| | |
|--------------|--------------|
| Keyboard | 4 keys |
| Display type | LCD 5 digits |

Digital inputs

| | |
|-------------------------------|------------------------|
| Input/output insulation | 2000 V ~ |
| Quantity | 2 |
| Type | Potential-free contact |
| Maximum short-circuit current | 3.3 mA dc |
| Maximum open circuit voltage | 17 Vdc |

Analogue outputs

| | |
|---------------------------------------|--------------------------------------|
| Quantity | 1 |
| Linearity | 0.5 % |
| Current mode, nominal range | 0 ... 20 mA, 4 ... 20 mA, 4-12-20 mA |
| Current mode: maximum load resistance | 350 Ω |
| Maximum internal voltage | 17 V dc |

Digital relay outputs

| | |
|------------------------------|---------------------------------|
| Quantity | 2 |
| Resistive load (max.) | 250 Vca / 5 Aca, 30 Vcc / 5 Acc |
| Maximum current | 5 A ~ |
| Maximum open contact voltage | 277 V ~ |
| Electrical life | 1 x 10 ⁵ |
| Maximum switching capacity | 1385 VA |

Measurement accuracy

| | |
|---------------------------|-------|
| Phase voltage measurement | 0.5 % |
|---------------------------|-------|

DHC-96



DHC-96 mVdc

Panel-mounted digital instruments

Code: M22348.

Digital instruments 96 x 48

| CODE | TYPE | Protocol | Scale | Communications | N° relays | Analog output | System | Paramètre | Modules | Measure | Power supply (Vac) |
|---------------------------|-------------|------------|------------------------------------------------|----------------|-----------|---------------|--------|-----------|---------|--------------------------------|--------------------|
| Voltmeters | | | | | | | | | | | |
| M22318. | DHC-96 Vac | Modbus/RTU | 63,5 V / 100 V / 110 V / 230 V / 380 V / 480 V | RS-485 | 2 | 1 (20 mA) | AC | V ~ | 96 x 48 | | |
| M22388. | DHC-96 Vdc | Modbus/RTU | ± 10 Vdc / ± 24 Vdc / ± 48 Vdc | RS-485 | 2 | 1 (20 mA) | DC | Vdc | 96 x 48 | ± 10 Vdc / ± 24 Vdc / ± 48 Vdc | 80 ... 270 Vac/Vdc |
| M22338. | DHC-96 HVdc | Modbus/RTU | ± 1500 V | RS-485 | 2 | 1 (20 mA) | DC | Vdc | 96 x 48 | | |
| Ammeters | | | | | | | | | | | |
| M22348. | DHC-96 mVdc | Modbus/RTU | 60 mV / 75 mV / 100 mV / 150 mV / 200 mV | RS-485 | 2 | 1 (20 mA) | DC | V dc | 96 x 48 | | |
| M22358. | DHC-96 Aac | Modbus/RTU | 1 A~ / 5 A~ | RS-485 | 2 | 1 (20 mA) | AC | A ~ | 96 x 48 | | |
| M22378. | DHC-96 Adc | Modbus/RTU | 1 Adc / 5 Adc | RS-485 | 2 | 1 (20 mA) | DC | A dc | 96 x 48 | | |
| Process indicators | | | | | | | | | | | |
| M22328. | DHC-96 LVdc | Modbus/RTU | ± 10 V | RS-485 | 2 | 1 (20 mA) | DC | Vdc | 96 x 48 | | |
| M22368. | DHC-96 mAdc | Modbus/RTU | -20 ... +20 mA / 0...20 mA / 4...20 mA | RS-485 | 2 | 1 (20 mA) | DC | mAdc | 96 x 48 | | |

Option of 0/2... 10 VDC outputs on demand




DHC-96 mVdc

Panel-mounted digital instruments

Code: M22348.

Dimensions

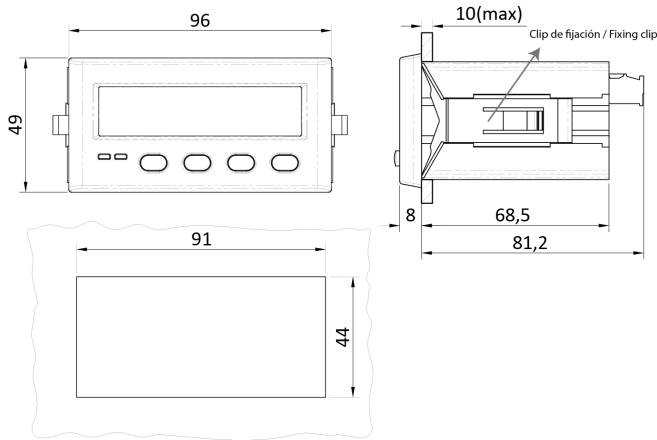

Connections

