




# M1 Multi Meter

3-in1 for measuring volts, amps or frequency

EVALUATION KIT AVAILABLE  
Contact us to request yours



## Advanced Panel Meter (APM)

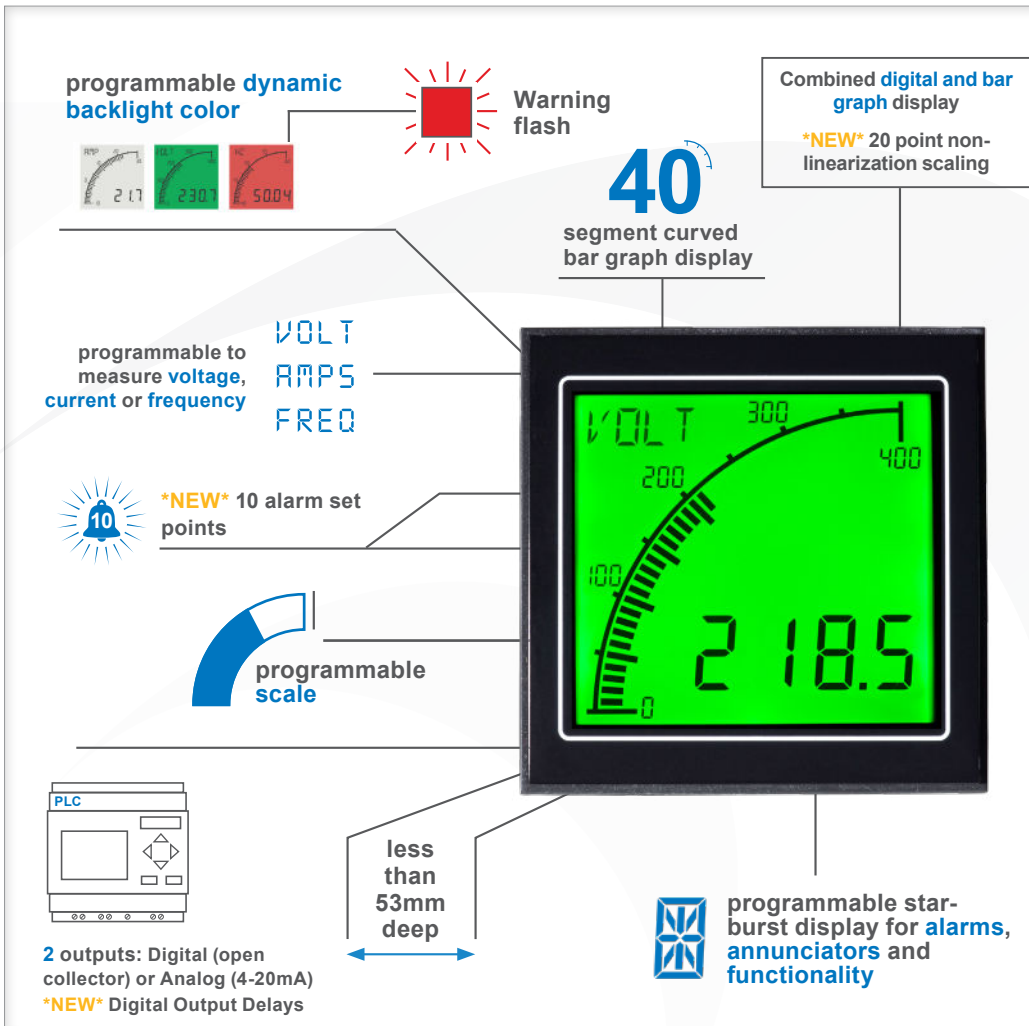

## Overview

### Measurement:

- Volts: 0-600 AC or DC
- Amps: 0-5A Direct  
0-10,000A via CT
- Frequency: 2Hz-400Hz

### Outputs:

- 2x: digital open collector or analog 4-20mA

### Configuration:

- PC Application via USB

### Display Options:

- Positive LCD
- Negative LCD



**POSITIVE**

**NEGATIVE**



Open-type Measuring and Testing Equipment E46972



## Key Features

- User configurable to measure voltage, current or frequency via APM application.
- User-programmable bar graph and alarms to immediately alert operators when a parameter is out of range.
- 4 character messaging area displays custom messages, alarms and annunciators.
- Interface to other equipment using digital and analogue outputs.
- Two LCD options: Positive (as shown) for use in bright conditions or Negative for use in darker environments.
- Customizable scale, including offset and gain, range (min and max) and linear.
- **\*NEW\*** T20 point non-linearization scaling for non-linear sensors e.g. thermocouples and pressure transducers.
- **\*NEW\*** 10 independent alarm set-points can be configured to change the backlight and/or message when input is in or out of range.
- **\*NEW\*** Configurable digital output delays (control the time output stays open/closed - .5 seconds – 120 seconds).

Go to [www.trumeter.com/apm](http://www.trumeter.com/apm) for further information

## Specifications

### POWER SUPPLY

Input	12-24V AC/DC +/-10%
Max Power	1.6W
Supply Frequency	50-400Hz

### ENVIRONMENTAL

Temperature - operating	-10 to +60°C
Temperature - storage	-40 to +70°C
IP rating (from the front)	IP65, NEMA type 4 and NEMA type 12 (UL 50)

### DISPLAY

User Configurable Backlight Colors	Red, Green, White
------------------------------------	-------------------

### ANALOG OUTPUT

Output	4-20 mA
Accuracy	0.50 %
Resolution	0.02 mA

### OPEN COLLECTOR OUTPUTS


Max voltage (open collector outputs)	34 VDC
Max current (open collector outputs)	500 mA

### CERTIFICATION

CE, RoHS, UL, cUL, UKCA
-------------------------

### MECHANICAL

Dimensions	72mm x 72mm x 53mm [2.83" x 2.83" x 2.09"]
Cutout	68mm x 68mm [2.68" x 2.63"]
Connection Type	Screw Terminals
Wire Gauge	0.8mm <sup>2</sup> - 3.3mm <sup>2</sup> (18AWG to 12AWG)
Weight	180 grams

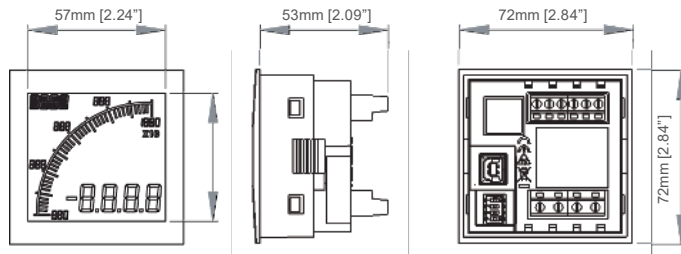

## Part Numbers

<b>APM-M1-APO</b>	APM M1 Meter Positive LCD
<b>APM-M1-ANO</b>	APM M1 Meter Negative LCD
<b>022128-01</b>	USB Cable
<b>022150-01</b>	APM Evaluation Kit

Full specifications available online [www.trumeter.com/apm](http://www.trumeter.com/apm)

