

Circutor

AC Ammeter

DHC-96 Aac



INSTRUCTION MANUAL

(M226B01-03-20A)

CE

SAFETY PRECAUTIONS

Follow the warnings described in this manual with the symbols shown below.



DANGER

Warns of a risk, which could result in personal injury or material damage.



ATTENTION

Indicates that special attention should be paid to a specific point.

If you must handle the unit for its installation, start-up or maintenance, the following should be taken into consideration:



Incorrect handling or installation of the unit may result in injury to personnel as well as damage to the unit. In particular, handling with voltages applied may result in electric shock, which may cause death or serious injury to personnel. Defective installation or maintenance may also lead to the risk of fire.

Read the manual carefully prior to connecting the unit. Follow all installation and maintenance instructions throughout the unit's working life. Pay special attention to the installation standards of the National Electrical Code.



Refer to the instruction manual before using the unit

In this manual, if the instructions marked with this symbol are not respected or carried out correctly, it can result in injury or damage to the unit and /or installations.

CIRCUTOR, SA reserves the right to modify features or the product manual without prior notification.

DISCLAIMER

CIRCUTOR, SA reserves the right to make modifications to the device or the unit specifications set out in this instruction manual without prior notice.

CIRCUTOR, SA on its web site, supplies its customers with the latest versions of the device specifications and the most updated manuals.

www.circutor.com



CIRCUTOR, recommends using the original cables and accessories that are supplied with the device.

CONTENTS

SAFETY PRECAUTIONS	3
DISCLAIMER	3
CONTENTS	4
REVISION LOG	6
SYMBOLS	6
1.- VERIFICATION UPON RECEPTION	7
2.- PRODUCT DESCRIPTION	7
3.- DEVICE INSTALLATION	8
3.1.- PRIOR RECOMMENDATIONS	8
3.2.- INSTALLATION	9
3.3.- DEVICE TERMINALS	10
3.4.- CONNECTION DIAGRAM	11
4.- OPERATION	12
4.1.- DISPLAY	12
4.2.- KEYBOARD FUNCTIONS	12
4.3.- RELAY OUTPUTS	13
4.4.- ANALOG OUTPUT	13
4.5.- DIGITAL INPUTS	13
4.6.- DISPLAY	13
5.- CONFIGURATION	15
5.1.- CONFIGURATION OF THE INPUT	17
5.1.1.- PRIMARY CURRENT	17
5.1.2.- UNITS OF THE PRIMARY CURRENT	18
5.1.3.- SECONDARY CURRENT	18
5.1.4.- SAVE CONFIGURATION	18
5.2.- RS-485 COMMUNICATIONS	19
5.2.1.- MODBUS ADDRESS	19
5.2.2.- BAUD RATE	20
5.2.3.- DATA FORMAT	20
5.2.4.- SAVE CONFIGURATION	21
5.3.- ANALOG OUTPUT	21
5.3.1.- TYPE OF OUTPUT	22
5.3.2.- READING FOR THE START OF THE ANALOG OUTPUT	22
5.3.3.- READING FOR THE END OF THE ANALOG OUTPUT	23
5.3.4.- SAVE CONFIGURATION	23
5.4.- RELAY OUTPUT 1	24
5.4.1.- RELAY MODE	24
5.4.2.- RELAY PULSE DURATION	25
5.4.3.- ALARM PARAMETER	25
5.4.4.- CONNECTION DELAY	26
5.4.5.- ALARM VALUE	26
5.4.6.- HYSTERESIS	27
5.4.7.- SAVE CONFIGURATION	28
5.5.- RELAY OUTPUT 2	28
5.6.- CONFIGURATION OF THE DISPLAY	28
5.6.1.- PASSWORD OFF ACCESS	29
5.6.2.- BRIGHTNESS OF THE DISPLAY	29
5.6.3.- LIGHT ALARM	30
5.6.4.- SAVE CONFIGURATION	30
5.7.- SOFTWARE VERSION	30
6.- RS-485 COMMUNICATIONS	31
6.1.- CONNECTIONS	31
6.2.- MODBUS PROTOCOL	32
6.2.1. READING EXAMPLE : FUNCTION 0x01	32
6.2.2. EXAMPLE OF OPERATION OF THE REMOTE CONTROL: FUNCTION	33
6.3.- MODBUS COMMANDS	33
6.3.1.- MEASUREMENT VARIABLES AND DEVICE STATUS	33
6.3.2.- OUTPUT RELAYS	33
6.3.3.- DIGITAL INPUTS	34

6.3.4.- REMOTE CONTROL OUTPUT (Relay output).....	34
6.3.5.- DEVICE CONFIGURATION VARIABLES	35
7.- TECHNICAL FEATURES	37
8.- MAINTENANCE AND TECHNICAL SERVICE.....	40
9.- GUARANTEE.....	40
10.- CE CERTIFICATE.....	41
ANNEX A.- CONFIGURATION MENU.....	44

REVISION LOG**Table 1: Revision log.**

Date	Revision	Description
11/18	M226B01-03-18A	Initial Version
01/19	M226B01-03-19A	Change in the following sections: 6.1. - 7. - 10.
01/20	M226B01-03-20A	Change in the following sections: 2.2. - 5.1. - 5.3.2. - 5.3.3. - 5.4.5. - 5.4.6. - 6.1. - 6.3.2. - 6.3.3. - 6.3.4. 6.3.5.1. - 6.3.5.3. - 6.3.5.4. - 6.3.5.5. - 7 . - Anexo A

SYMBOLS**Table 2: Symbols.**

Symbol	Description
	In compliance with the relevant European directive.
	Device covered by European directive 2012/19/EC. At the end of its useful life, do not leave the unit in a household waste container. Follow local regulations on electronic equipment recycling.
	DC current
	AC current

Note : Devices images are for illustrative purposes only and may differ from the actual device.

1.- VERIFICATION UPON RECEPTION

Check the following points when you receive the device:

- a) The device meets the specifications described in your order.
- b) The device has not suffered any damage during transport.
- c) Perform an external visual inspection of the device prior to switching it on.
- d) Check that it has been delivered with the following:
 - An installation guide,



If any problem is noticed upon reception, immediately contact the transport company and/or **CIRCUTOR's** after-sales service.

2.- PRODUCT DESCRIPTION

The **DHC-96 Aac** is a device designed to measure and display the current and frequency AC single-phase. The device has 2 programmable current scales: 1 A and 5 A.



The device features:

- **4 keys** that allow you to browse between the various screens and program the device.
- **LED display**, displays all parameters.
- **2 fully programmable relay outputs**
- **2 digital inputs**.
- **1 programmable analog output**
- Communications **RS-485**.

Table 3:DHC-96 Aac list of models.

Model	Power Supply		
	80 ... 270 V ~	80 ... 270 V ___	18 .. 36 V ___
M22358	✓	✓	-
M223580030000	-	-	✓

3.- DEVICE INSTALLATION

3.1.- PRIOR RECOMMENDATIONS



In order to use the device safely, it is critical that individuals who handle it follow the safety measures set out in the standards of the country where it is being used, use the necessary personal protective equipment, and pay attention to the various warnings indicated in this instruction manual.

The **DHC-96 Aac** device must be installed by authorised and qualified staff.

The power supply plug must be disconnected and measuring systems switched off before handling, altering the connections or replacing the device. It is dangerous to handle the device while it is powered.

Also, it is critical to keep the cables in perfect condition in order to avoid accidents, personal injury and damage to installations.

The device's functionality is limited to the category of measuring voltage or specific current values.

The manufacturer of the device is not responsible for any damage resulting from failure by the user or installer to heed the warnings and/or recommendations set out in this manual, nor for damage resulting from the use of non-original products or accessories or those made by other manufacturers.

If an anomaly or malfunction is detected in the device, do not use it to take any measurements.



Disconnect the device from the power supply (device and measuring system power supply) before maintaining, repairing or handling the device's connections. Please contact the after-sales service if you suspect that there is an operational fault in the device.

3.2.- INSTALLATION



Terminals, opening covers or removing elements can expose parts that are hazardous to the touch while the device is powered. Do not use the device until it is fully installed.

The device should be installed inside an electric panel or enclosure, and panel-mounted.

To install it, take the following steps:

1.- Make a cut in the panel, according to the dimensions in **Figure 1**.

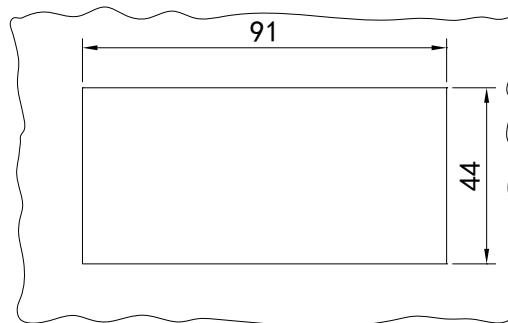


Figure 1: Cut in the panel.

2.- Remove the device's fixing clips (**Figure 2**).

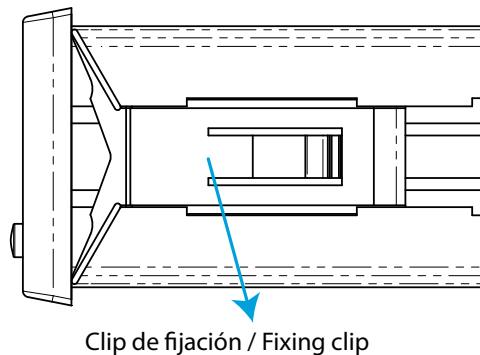


Figure 2: Installation.

3.- Insert the device into the cut in the panel.

4.- Fit the fixing clips until the device is fixed to the panel.

The device should be connected to a power circuit protected by a fuse with a maximum nominal current of **0.25 A**.

3.3.- DEVICE TERMINALS

Table 4:List of terminals of the DHC-96 Aac.

Device terminals	
1 : L, Auxiliary power supply.	31: Alarm output 2, relay (Common)
2: N, Auxiliary power supply.	32: Alarm output 2, relay (NO)
4: Current measurement input	58: A, RS-485
5: Current measurement input	59: B, RS-485
15: -, Analog output	70: Common digital input
16: +, Analog output	71: Digital input 1
28: Alarm output 1, relay (Common)	72: Digital input 2
29: Alarm output 1, relay (NO)	

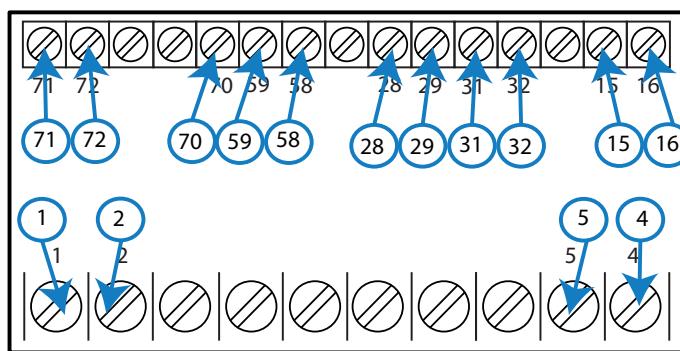


Figure 3:Terminals of the DHC-96 Aac.

Note: Before disconnecting the current measurement connection cables, make sure that you disconnect the transformer's primary cable and bridge the secondary.

3.4.- CONNECTION DIAGRAM

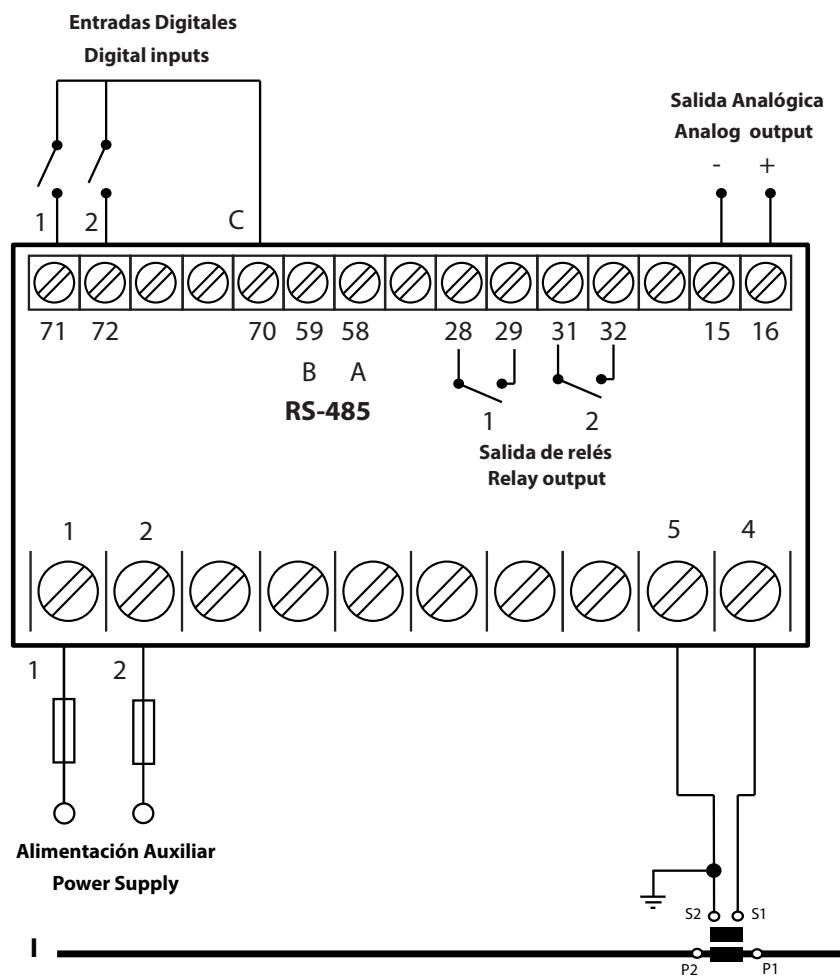


Figure 4: Current measurement DHC-96 Aac.

If the current being measured is higher than the nominal input current, **5A**, a current transformer should be connected to the device.

If more than one device is connected to the current transformer, it is necessary to connect them in series.

4.- OPERATION

4.1.- DISPLAY

The device features a 5-digit LED display, which is used to display the measured parameters and to configure these parameters

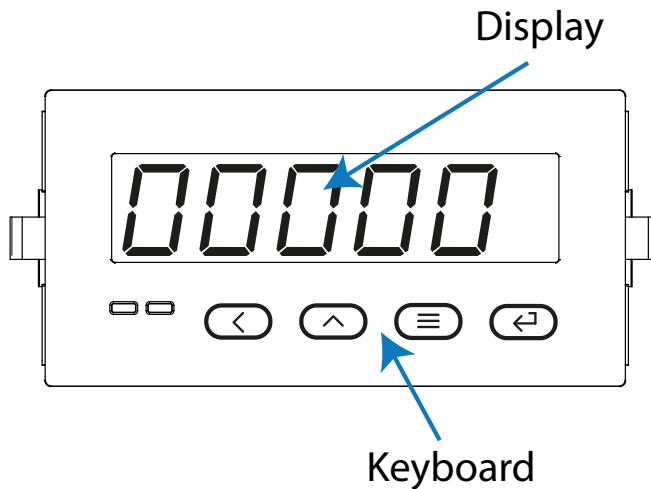


Figure 5: Display DHC-96.

4.2.- KEYBOARD FUNCTIONS

The **DHC-96 Aac** features 4 keys to display and configure the device, **Figure 5**.

Table 5: Keyboard functions.

Key	Keystroke
<	Previous screen In the configuration menu: Scroll through the digits
^	Next screen In the configuration menu: Increase the value of the digit
≡	Long keystroke (> 3s): Enter in configuration menu
→	In the configuration menu: Jump to the next level / Confirm an operation

4.3.- RELAY OUTPUTS

The device features two programmable relay outputs (terminals 28, 29, 31 and 32, as shown in **Figure 6**) that can be programmed as remote control signals or alarms in the setup menu (“**5.4.- RELAY OUTPUT 1**” and “**5.5.- RELAY OUTPUT 2**”).

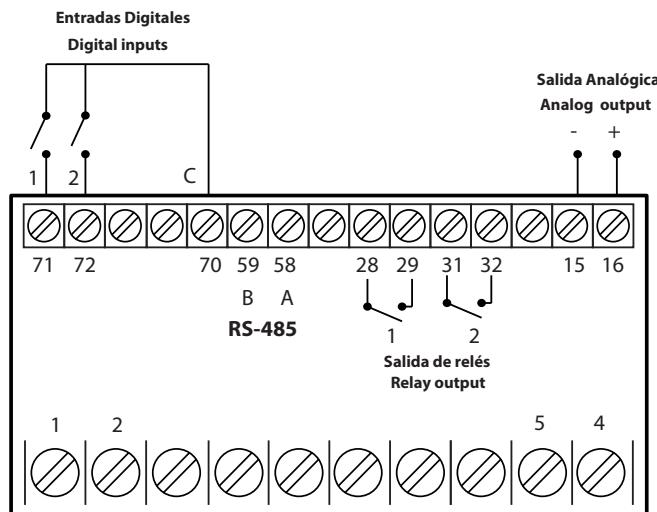


Figure 6: Relay outputs, digital inputs and Analog output.

4.4.- ANALOG OUTPUT

The device has an analog output (terminals 15 and 16 of **Figure 6**) programmable through the configuration menu (“**5.3.- ANALOG OUTPUT**”)

4.5.- DIGITAL INPUTS

The device has two digital inputs (terminals 70, 71 and 72 of **Figure 6**). The relay outputs can be activated depending on the value of the digital inputs (See “**5.4.- RELAY OUTPUT 1**” and “**5.5.- RELAY OUTPUT 2**”)

4.6.- DISPLAY

The **DHC-96 Aac** features 4 display screens, **Table 6**.

Table 6: Display menu.

Display menu	
Current	5.000

Table 6 (Continuation) : Display menu.

Display menu	
F	50.00
Frequency	
di	12
Status of digital inputs:	
1, status of the digital input 1: flashes when the input is activated 2, status of the digital input 2: flashes when the input is activated	
do	12
Status of the relay outputs:	
1, status of the relay output 1: flashes when the relay is activated 2, status of the relay output 2: flashes when the relay is activated	

If the current value measured by the device is higher than a % of the nominal value, the device can make the digits on the display start flashing, in the form of a light alarm. See “**5.6.3.- LIGHT ALARM**”

5.- CONFIGURATION

Press and hold the  key for more than 3 seconds to enter the configuration menu of the device.

The configuration of the device is organized in different menus, **Figure 7**.

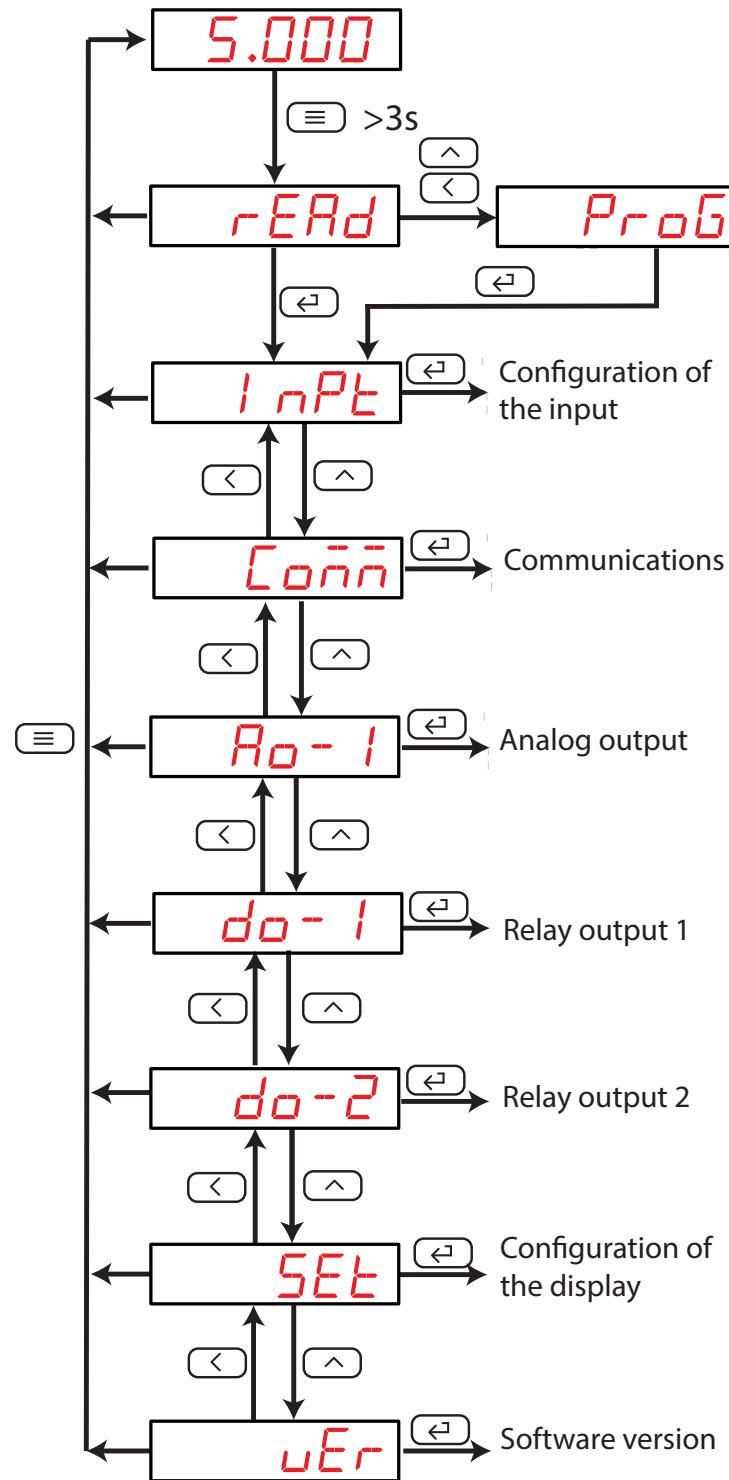


Figure 7: Configuration menu of the DHC-96 Aac.

From any screen of the configuration menus, if no key is pressed for 4 minutes, the device leaves the configuration menu and returns to the display screen.

Note: In “**ANNEX A.- CONFIGURATION MENU**” you can see the complete configuration menu.

On the *rERd* screen, press the key to access the configuration menu in the **display mode**, i.e., the configuration parameters cannot be modified.

On the *rERd* screen, press the or keys to access the configuration menu in the **programming mode**, i.e., the configuration parameters can be modified.

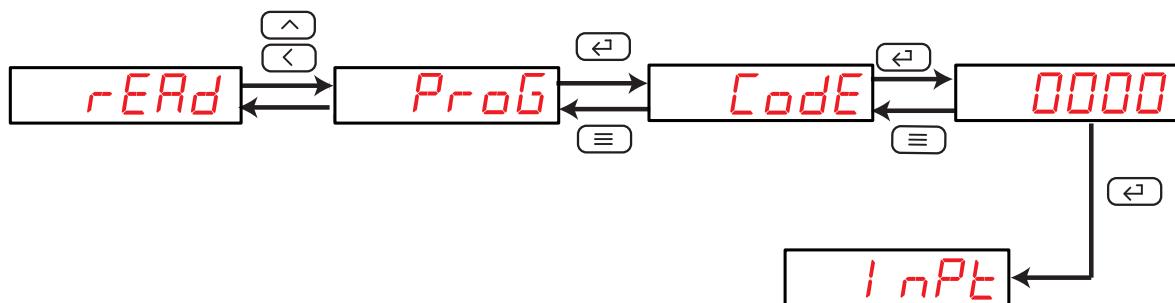


Figure 8: Access the configuration menu in the programming mode.

Before accessing the configuration menu, it is necessary to enter the access password.

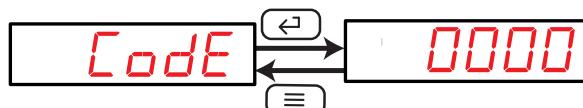


Figure 9: Access password.

Use the key to modify the value of the flashing digit

When the desired value is shown on the screen, press the key to skip the digit.

Default password: 0001

Note : The password can be modified, see “**5.6.1.- PASSWORD OF ACCESS**”.

To validate the data, press the key.

If the password entered is incorrect, the *Err* message will appear for a few seconds and the device will return to the password configuration screen, **Figure 9**.

5.1.- CONFIGURATION OF THE INPUT

Figure 10, shows the main screen of the input configuration menu, from which the primary current and secondary current are configured.



Figure 10: Input configuration menu, main screen.

Press the key to open the configuration menu.


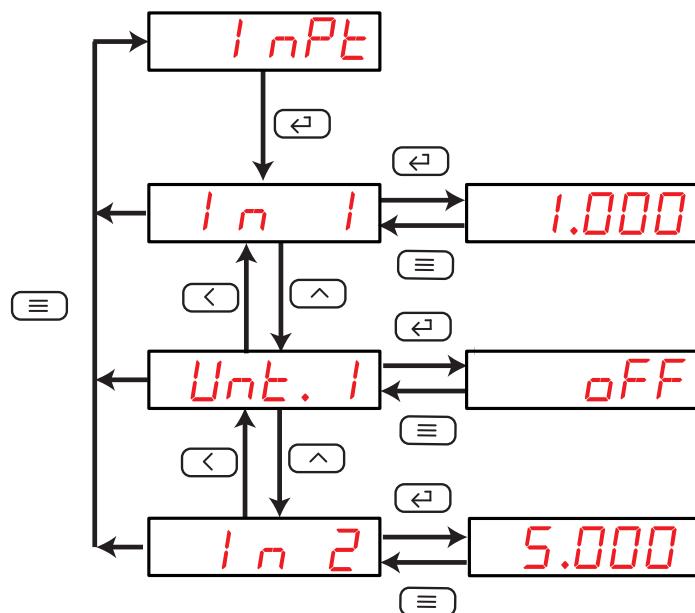


Figure 11:Input configuration menu.

5.1.1.- PRIMARY CURRENT

This screen is used to configure the value of the primary current.

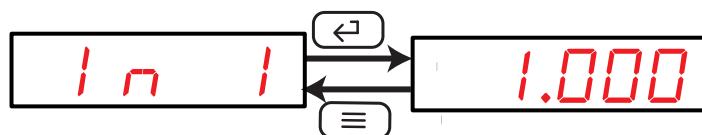

Use the key to modify the value of the flashing digit

When the desired value is shown on the screen, press the key to skip the digit.

When you reach the last digit and press the key, you select the position of the decimal point. Use the to modify the decimal point.

Minimum configuration value: 0.


Maximum configuration value: 9999.

To validate the data, press the  key.

Use the  and  keys to browse the configuration screens of the menu.

5.1.2.- UNITS OF THE PRIMARY CURRENT

This screen is used to configure the units of the primary current.

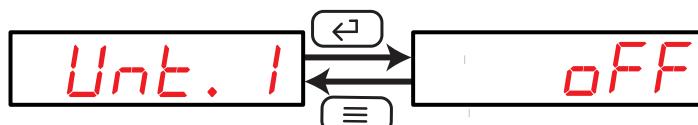

Use the  key to browse the different options:

OFF, the unit of the primary current is **A**.


ON, the unit of the primary current is **kA**.

To validate the data, press the  key.

Use the  and  keys to browse the configuration screens of the menu.

5.1.3.- SECONDARY CURRENT

This screen is used to configure the value of the secondary current.

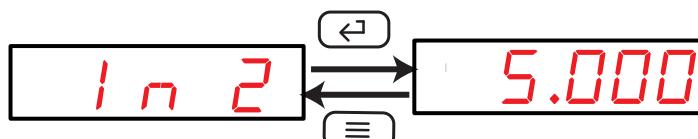

Use the  and  keys at the same time to configure the value.

Use the  key to browse the different options:

5.000, for the current scale of 0 ... 5 A.

1.000, for the current scale of 0 ... 1 A.

To validate the data, press the  key.

Use the  and  keys to browse the configuration screens of the menu.

5.1.4.- SAVE CONFIGURATION

To save the configuration of the device, press the  key, until the main screen of the input configuration menu is opened, **Figure 10**.

Press the  key again to show the validation screen.



Use the key to browse the different options:

no, exit the configuration without saving the changed values.

YES, save the changed configuration values.

Press the key to validate the data and exit the configuration menu.

5.2.- RS-485 COMMUNICATIONS

Figure 12, shows the main screen of the communications menu, where the parameters of the RS-485 communications are configured.




Figure 12: RS-485 communications menu, main screen.

Press the key to open the configuration menu.


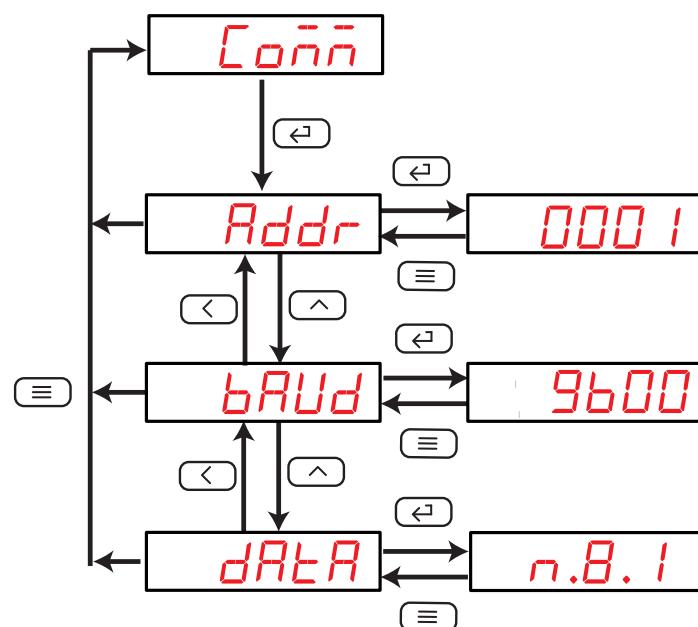


Figure 13:RS-485 communications menu

5.2.1.- MODBUS ADDRESS

This screen is used to configure the modbus address of the device.

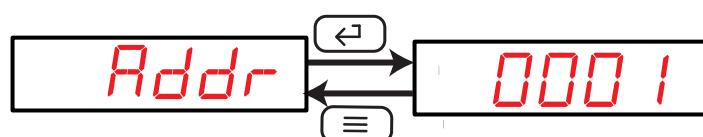

Use the key to modify the value of the flashing digit

When the desired value is shown on the screen, press the key to skip the digit.

Minimum configuration value: 1


Maximum configuration value: 247.

To validate the data, press the key.

Use the and keys to browse the configuration screens of the menu.

5.2.2.- BAUD RATE

In this screen, the baud rate of RS-485 communications is selected.

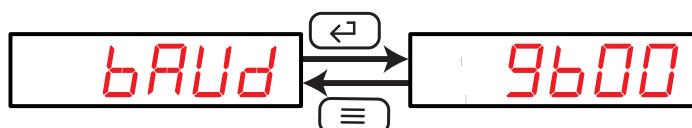

Use the key to browse the different options:

2400, 9600 bps.

4800, 9600 bps.

9600, 9600 bps.


19.20, 19200 bps.

To validate the data, press the key.

Use the and keys to browse the configuration screens of the menu.

5.2.3.- DATA FORMAT

This screen is used to configure the data format.

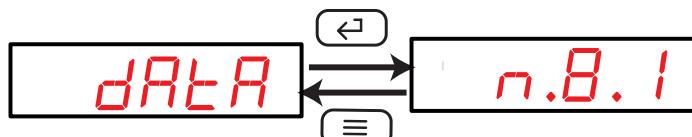

Use the key to browse the different options:

n.B.1, no parity, 8 data bits, 1 stop bit

o.B.1, odd parity, 8 data bits, 1 stop bit

E.B.1, even parity, 8 data bits, 1 stop bit

n.B.2, no parity, 8 data bits, 2 stop bit

To validate the data, press the key.

Use the and keys to browse the configuration screens of the menu.

5.2.4.- SAVE CONFIGURATION

To save the configuration of the device, press the  key, until the main screen of the input configuration menu is opened, **Figure 10**.

Press the  key again to show the validation screen.



Use the  key to browse the different options:

no, exit the configuration without saving the changed values.

YES, save the changed configuration values.

Press the  key to validate the data and exit the configuration menu.

5.3.- ANALOG OUTPUT

Figure 14, shows the main screen of the analog output menu.



Figure 14: Analog output menu, main screen.

Press the  key to open the configuration menu.


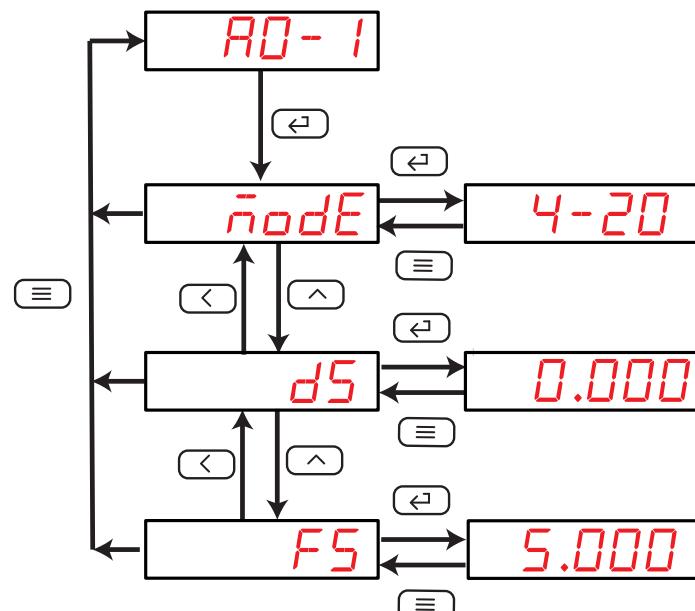


Figure 15: Analog output menu.

5.3.1.- TYPE OF OUTPUT

In this screen the output type of the analog output is configured

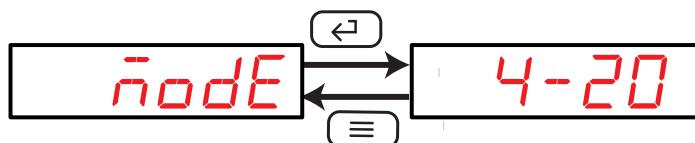

Use the and keys at the same time to configure the value.

Use the key to browse the different options:

4-20, Current output 4 ... 20 mA

0-20, Current output 0 ... 20 mA


12.20, Current output 4 ...12 ... 20 mA

To validate the data, press the key.

Use the and keys to browse the configuration screens of the menu.

5.3.2.- READING FOR THE START OF THE ANALOG OUTPUT

In this screen, the reading value from which the analog output is started is configured.

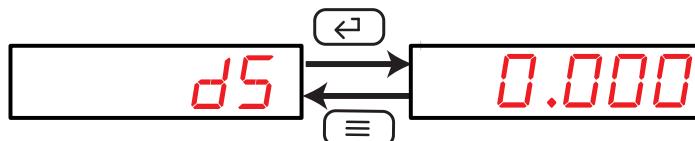

Use the key to modify the value of the flashing digit

When the desired value is shown on the screen, press the key to skip the digit.

Minimum configuration value: 0.000

Maximum configuration value: 0.5 x **A**.

Note: **A** is 5000 if the **secondary current** programmed is 5.000 and 1000 if the **secondary current** programmed is 1.000.


Note: **FS** (End of the analog output) - **DS** (Start of the analog output) ≥ 500

To validate the data, press the key.

Use the and keys to browse the configuration screens of the menu.

5.3.3.- READING FOR THE END OF THE ANALOG OUTPUT

In this screen, the reading value from which the analog output ends is configured.

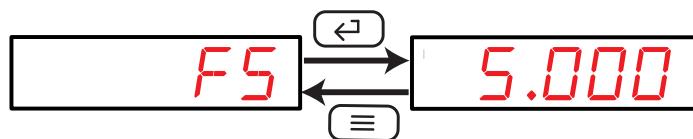

Use the key to modify the value of the flashing digit

When the desired value is shown on the screen, press the key to skip the digit.

Minimum configuration value: 0.5 x A.

Maximum configuration value: 1.2 x A.

Note: A is 5000 if the **secondary current** programmed is 5.000 and 1000 if the **secondary current** programmed is 1.000.

Note: FS (End of the analog output) - DS (Start of the analog output) ≥ 500

To validate the data, press the key.

Use the and keys to browse the configuration screens of the menu.

5.3.4.- SAVE CONFIGURATION

To save the configuration of the device, press the key, until the main screen of the input configuration menu is opened, **Figure 10**.

Press the key again to show the validation screen.



Use the key to browse the different options:

no, exit the configuration without saving the changed values.

YES, save the changed configuration values.

Press the key to validate the data and exit the configuration menu.

5.4.- RELAY OUTPUT 1

Figure 16, shows the main screen of the configuration menu of relay output 1.




Figure 16: Configuration menu of relay output 1, main screen.

Press the key to open the setup menu.


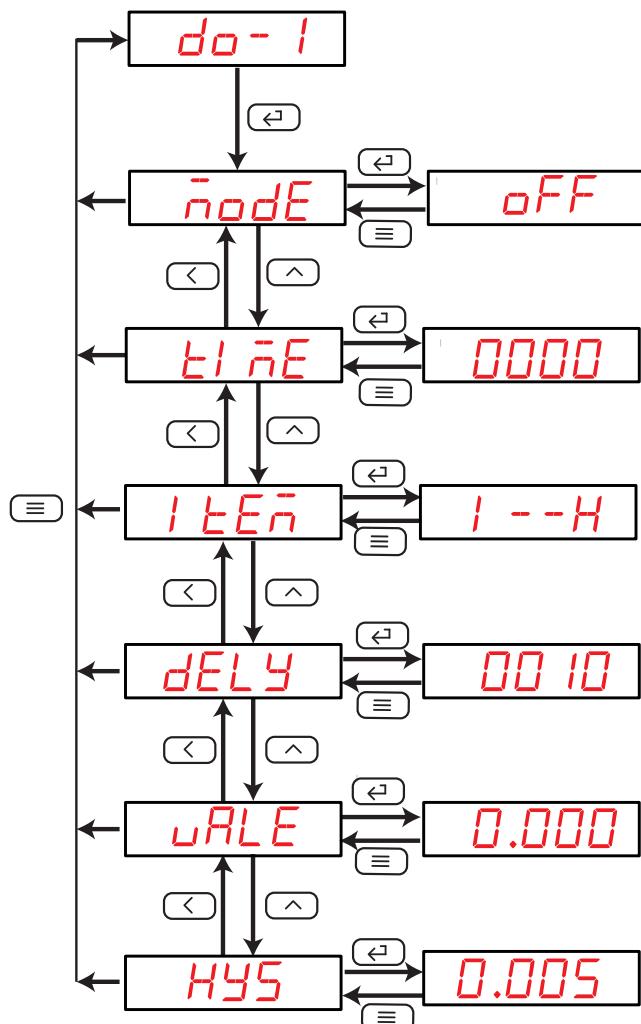


Figure 17: Configuration menu of relay output 1.

5.4.1.- RELAY MODE

This screen is used to configure the operating mode of relay 1.

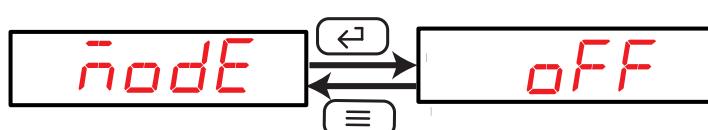

Use the key to browse the different options:

$\square FF$, relay output 1 is disabled.

$r E\bar{n}$, remote control output.

$RL r$, alarm output.

To validate the data, press the key.

Use the and keys to browse the configuration screens of the menu.

5.4.2.- RELAY PULSE DURATION


The alarm relay can behave in 2 different ways:

1..- The relay is activated when the alarm is triggered and is deactivated when the alarm is deactivated.

2..- The relay is activated when the alarm is triggered and is deactivated after a programmed period of time, even though the alarm condition has not been cancelled.

This screen is used to configure the programmed time, i.e., the relay pulse duration.

To make the relay operate in mode **no. 1**, program the value to **0**.

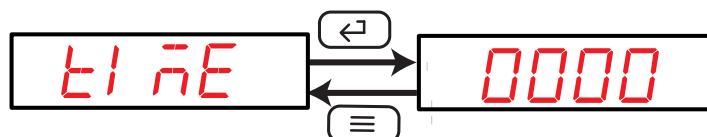

Use the key to modify the value of the flashing digit

When the desired value is shown on the screen, press the key to skip the digit.

Minimum configuration value: 0 x 0.1 s

Maximum configuration value: 9999 x 0.1 s


Example: Use program 0050 to configure a value of 5 s.

To validate the data, press the key.

Use the and keys to browse the configuration screens of the menu.

5.4.3.- ALARM PARAMETER

This screen is used to configure the parameter that will be used to activate the alarm.

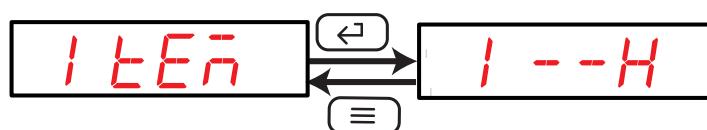

Use the key to browse the different options:

$F - - H$, Active alarm when the frequency is higher than the alarm value.


- I --H*, Active alarm when the current is higher than the alarm value.
- F --L*, Active alarm when the frequency is less than the alarm value.
- I --L*, Active alarm when the current is less than the alarm value.
- dl 1H*, Active alarm when digital input 1 is connected.
- dl 2H*, Active alarm when digital input 2 is connected.
- dl 1L*, Active alarm when digital input 1 is disconnected.
- dl 2L*, Active alarm when digital input 2 is disconnected.

To validate the data, press the  key.

Use the  and  keys to browse the configuration screens of the menu.

5.4.4.- CONNECTION DELAY

This screen is used to configure the alarm connection delay.

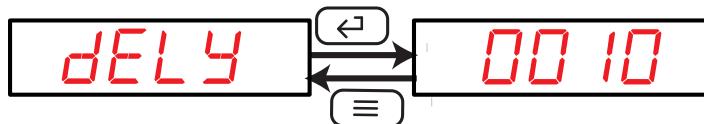

Use the  key to modify the value of the flashing digit

When the desired value is shown on the screen, press the  key to skip the digit.

Minimum configuration value: 0 x 0.1 s

Maximum configuration value: 9999 x 0.1 s

Example: Use program 0050 to configure a value of 5 s.

To validate the data, press the  key.

Use the  and  keys to browse the configuration screens of the menu.

5.4.5.- ALARM VALUE

This screen configures the input value of the device from which the alarm will be activated. This value must be entered with reference to the value of the secondary current.


Example: In an installation where it has been programmed:

Primary current : 40.00 A

Units of the primary current : OFF (A)

Secondary current: 5.000 A

If you want to activate the alarm at a value of 7A, the value to be programmed in this screen is:
 $(5 \text{ A} \times 7 \text{ A}) / 40\text{A} = 0.875 \text{ A}$

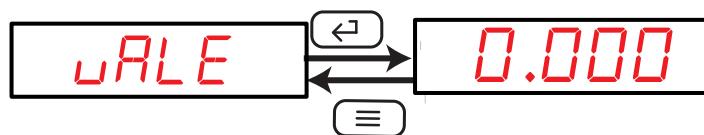

Use the key to modify the value of the flashing digit

When the desired value is shown on the screen, press the key to skip the digit.

Minimum configuration value:

0.000 For **alarm parameters**: $I_{--H}, I_{--L}, dI_{IH}, dI_{2H}, dI_{IL}, dI_{2L}$

00.00 For **alarm parameters**: F_{--H}, F_{--L}

Maximum configuration value:

9.999 For **alarm parameters**: $I_{--H}, I_{--L}, dI_{IH}, dI_{2H}, dI_{IL}, dI_{2L}$


99.99 For **alarm parameters**: F_{--H}, F_{--L}

To validate the data, press the key.

Use the and keys to browse the configuration screens of the menu.

5.4.6.- HYSTERESIS

This screen is used to configure the hysteresis value, i.e., the difference between the alarm connection and disconnection value.

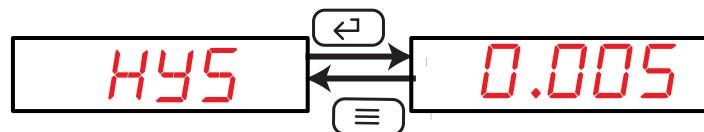

Use the key to modify the value of the flashing digit

When the desired value is shown on the screen, press the key to skip the digit.

Minimum configuration value:

0.000 For **alarm parameters**: $I_{--H}, I_{--L}, dI_{IH}, dI_{2H}, dI_{IL}, dI_{2L}$

00.00 For **alarm parameters**: F_{--H}, F_{--L}

Maximum configuration value:

9.999 For **alarm parameters**: $I_{--H}, I_{--L}, dI_{IH}, dI_{2H}, dI_{IL}, dI_{2L}$

99.99 For **alarm parameters**: F_{--H}, F_{--L}

To validate the data, press the key.

Use the and keys to browse the configuration screens of the menu.

5.4.7.- SAVE CONFIGURATION

To save the configuration of the device, press the  key until the main screen of the relay output 1 configuration menu is opened, **Figure 16**.

Press the  key again to show the validation screen.



Use the  key to browse the different options:

no, exit the configuration without saving the changed values.

YES, save the changed configuration values.

Press the  key to validate the data and exit the configuration menu.

5.5.- RELAY OUTPUT 2

Figure 18, shows the main screen of the configuration menu of relay output 2.



Figure 18: Configuration menu of relay output 2, main screen.

The configuration is the same as for alarm relay 1, see "**5.4.- RELAY OUTPUT 1**".

5.6.- CONFIGURATION OF THE DISPLAY

Figure 19, shows the main screen of the configuration menu of the display.



Figure 19: Configuration menu of the display, main screen.

Press the  key to open the configuration menu.


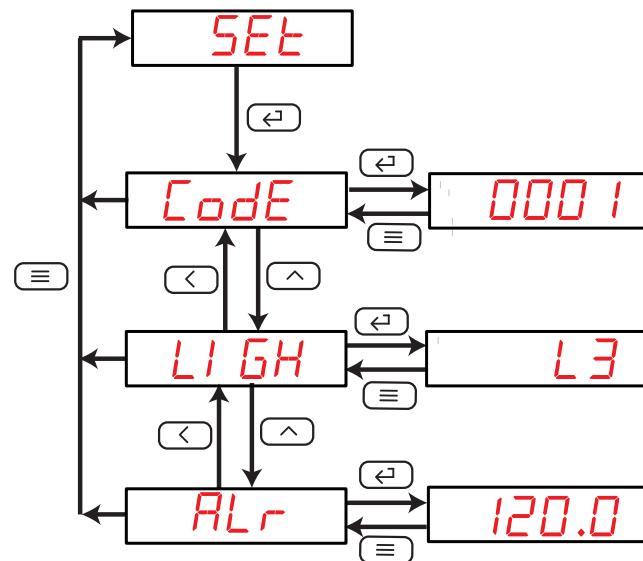


Figure 20: Configuration menu of the display.

5.6.1.- PASSWORD OFF ACCESS

This screen is used to configure the value of the password used to access the configuration menu in the **programming mode**.

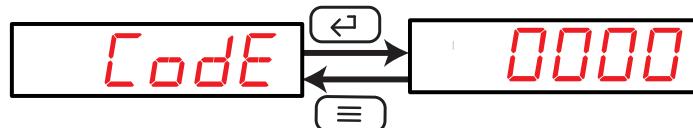

Use the **^** key to modify the value of the flashing digit

When the desired value is shown on the screen, press the **<** key to skip the digit.

Minimum configuration value: 0


Maximum configuration value: 9999

To validate the data, press the **<--** key.

Use the **<** and **>** keys to browse the configuration screens of the menu.

5.6.2.- BRIGHTNESS OF THE DISPLAY

The brightness of the display is configured on this screen.

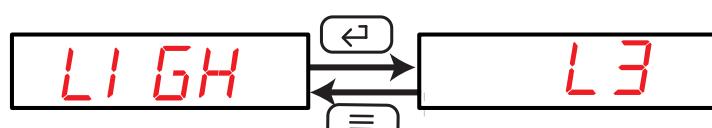


Use the **^** key to browse the different options: the display has 5 brightness levels, from **L1** to **L5**.

To validate the data, press the **<--** key.

Use the **<** and **>** keys to browse the configuration screens of the menu.

5.6.3.- LIGHT ALARM

If the current value measured by the device is higher than a % of the nominal value, the device can make the digits on the display start flashing, in the form of a light alarm.

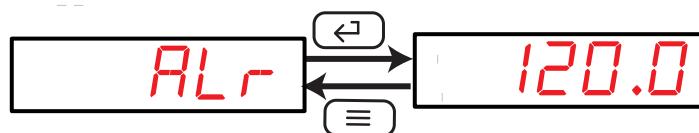

Use the key to modify the value of the flashing digit.

When the desired value is shown on the screen, press the key to skip the digit.

Minimum configuration value: 30.0%

Maximum configuration value: 120.0%

Note: If the a value of 0 is programmed, the light alarm will be deactivated.

To validate the data, press the key.

Use the and keys to browse the configuration screens of the menu.

5.6.4.- SAVE CONFIGURATION

To save the configuration of the device, press the key until the main screen of the configuration menu of the display is opened, **Figure 19**.

Press the key again to show the validation screen.



Use the key to browse the different options:


no, exit the configuration without saving the changed values.

YES, save the changed configuration values.

Press the key to validate the data and exit the configuration menu.

5.7 - SOFTWARE VERSION

The software version of the device is shown in the **display mode**.

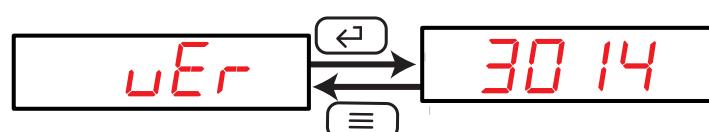

6.- RS-485 COMMUNICATIONS

The **DHC-96** devices have one **RS-485** communications port, with communications protocols: **MODBUS RTU ®**.

6.1.- CONNECTIONS

The **RS-485** cable must be wired with twisted pair cable with mesh shield, with a maximum distance between the **DHC-96** and the master device of 1200 metres. A maximum of 32 **DHC-96** devices can be connected to this bus.

Use an intelligent **RS-232** to **RS-485** network protocol converter to establish the communications with the master device.

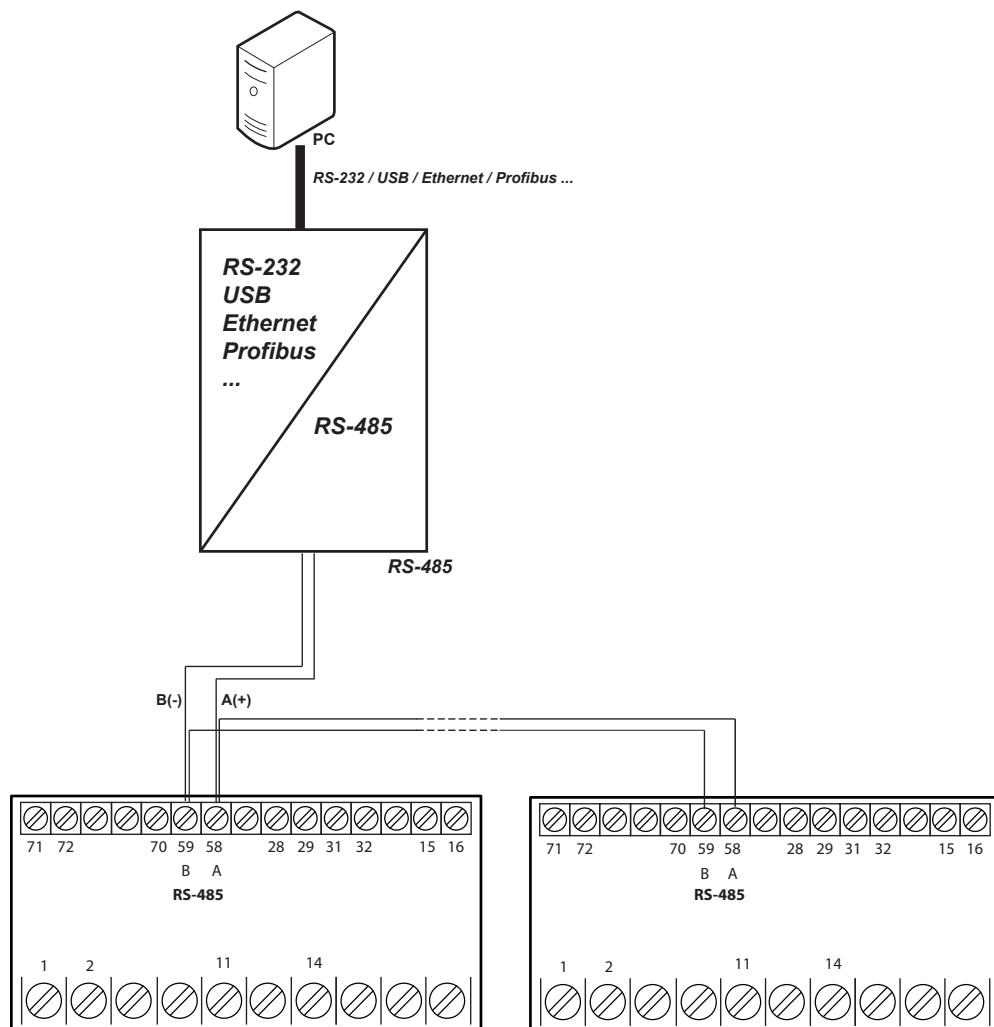


Figure 21: RS-485 Connection diagram.

Note: Default values of the RS-485 communication : **19200 bps, No parity, 8 data bits and 1 stop bit.**

6.2.- MODBUS PROTOCOL

In the Modbus protocol, the **DHC-96** device uses the RTU (Remote Terminal Unit) mode. The Modbus functions implemented in the device are as follows:

Function 0x01: Reading a relay.

Function 0x02: Reading input status.

Function 0x03 and 0x04: Reading integer registers.

Function 0x05: Writing a relay.

Function 0x0F: Writing multiples relays

Function 0x10: Writing multiples registers.

6.2.1. READING EXAMPLE : FUNCTION 0x01.

Question: Status of output relays

Address	Function	Initial Register	No. of Registers	CRC
01	01	0000	0002	BDCB

Address: 01, Peripheral number: 1 in decimal.

Function: 01, Read function.

Initial Register: 0000, on which the reading will start.

No. of Registers: 0002, number of registers read.

CRC: BDCB, CRC Character.

Response:

Address	Function	No. of Bytes	Register No. 1	CRC
01	01	01	03	1189

Address: 01, Responding peripheral number: 1 in decimal.

Function: 01, Read function.

No. of bytes: 01, No. of bytes received.

Registre: 03, in binary it is: 0000 0011, output relays 1 and 2 closed.

CRC: 1189, CRC.Character.

6.2.2. EXAMPLE OF OPERATION OF THE REMOTE CONTROL: FUNCTION 0X05.

Question: Activate the output of relay 1, programmed to work in remote control mode.

Address	Function	Initial Register	Relay action	CRC
01	05	0000	FF00	8C3A

Address: 01, Peripheral number: 1 in decimal.

Function: 05, Writing a relay

Initial Register: 0000, relay 1 address.

Relay action: FF00, We indicate that we want to close the relay.

CRC: 8C3A, CRC.Character.

Response:

Address	Function	Initial Register	Relay action	CRC
01	05	0000	FF00	8C3A

6.3.- MODBUS COMMANDS**6.3.1.- MEASUREMENT VARIABLES AND DEVICE STATUS**

All the addresses of Modbus memory are in Hexadecimal.

For these variables is implemented the **Function 0x03** and **0x04**.

Table 7: Modbus memory map (Table 1)

Parameter	Format	Address	Units
Current	float	12	A
Current	int	10C	0.001 A
Frequency	float	2C	Hz
Frequency	int	120	0.01 Hz

Table 8: Modbus memory map (Table 2)

Parameter	Format	Address	Value
Status of output relays bit [0] - bit [2]	bit [32]	100 - 101	0: open 1: closed
Status of digital inputs bit [0] - bit [2]	bit [32]	102 - 103	0: open 1: closed
Communications ID	int	104	504

6.3.2.- OUTPUT RELAYS

All the addresses of Modbus memory are in Hexadecimal.

For these variables is implemented the **Function 0x01**, **0x05** and **0x0F**.

Table 9: Modbus memory map (Table 3)

Parameter	Format	Address
Output relay	bit	0000

The format of the parameter is shown in **Table 10:**

Table 10:Format of the variables : Output relays.

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	0	0	0	0	Relay 2 1: Closed 0: Open	Relay 1 1: Closed 0: Open

6.3.3.- DIGITAL INPUTS

All the addresses of Modbus memory are in Hexadecimal.
For these variables is implemented the **Function 0x02**.

Table 11: Modbus memory map (Table 4)

Parameter	Format	Address
Digital inputs	bit	0000

The format of the parameter is shown in **Table 12**:

Table 12: Format of the variables : Digital inputs.

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	0	0	0	0	Digital input 2 1: Closed 0: Open	Digital input 1 1: Closed 0: Open

6.3.4.- REMOTE CONTROL OUTPUT (Relay output)

All the addresses of Modbus memory are in Hexadecimal.
For these variables is implemented the **Function 0x05**:

Table 13: Modbus memory map (Table 5)

Parameter	Format	Address	Value
Remote control, Output relay 1	bit	0000	0000: open, FF00: closed
Remote control, Output relay 2	bit	0001	0000: open, FF00: closed

Function 0x0F, multiple relay control:

Table 14: Modbus memory map (Table 6)

Parameter	Format	Address
Remote control	bit	0000

The format of the parameter is shown in **Table 15**:

Table 15: Format of the variables: Remote control.

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	0	0	0	0	0	Relay 2 1: Closed 0: Open	Relay 1 1: Closed 0: Open

6.3.5.- DEVICE CONFIGURATION VARIABLES

All the addresses of Modbus memory are in Hexadecimal.
For these variables is implemented the **Function 0x10**.

6.3.5.1. Configuration of the input

Table 16:Modbus memory map : Configuration of the input

Configuration of the input			
Variable	Format	Address	Valid data margin
Primary current	int	809	1 ... 9999
Decimal point of the primary current	int	80A	0: xxxx - 1: xxx.x - 2: xx.xx - 3: x.xxx
Units of the primary current	int	806	0: A - 1: kA
Secondary current	int	80B	0: 0 ... 1A - 1: 0 ... 5A

6.3.5.2. RS-485 communications

Table 17:Modbus memory map : RS-485 communications

RS-485 communications			
Variable	Format	Address	Valid data margin
Modbus address	int	802	1 ... 247
Baud rate	int	803	0: 2400 bps - 1: 4800 bps - 2: 9600 bps - 3: 19200 bps
Data format	int	804	0: n,8,1 : no parity, 8 data bits, 1 stop bit 1: o,8,1 : odd parity, 8 data bits, 1 stop bit 2: e,8,1 : even parity, 8 data bits, 1 stop bit 3: n,8,2 : no parity, 8 data bits, 2 stop bit

6.3.5.3. Analog output

Table 18:Modbus memory map : Analog output

Analog output			
Variable	Format	Address	Valid data margin
Reading for the end of the analog output (fs)	int	815	$0.5 \times \mathbf{A}^{(1)} \leq \mathbf{fs} \leq 1.2 \times \mathbf{A}^{(1)}$
Reading for the start of the analog output (ds)	int	816	$0 \leq \mathbf{ds} \leq 0.5 \times \mathbf{A}^{(1)}$
Type of output	int	817	0: 4 ... 20 mA 1: 0 ... 20 mA 2: 4... 12 ... 20 mA

⁽¹⁾ **A:** **A** is 5000 if the Secondary current programmed is 5.000(**1**) and 1000 if the Secondary current programmed is 1.000(**0**).

6.3.5.4. Relays outputs

Table 19:Modbus memory map : Relay outputs.

Relay outputs			
Variable	Format	Address	Valid data margin
Relay 1 mode	int	820	0: output is disabled. 1: alarm output 2: remote control output.
Relay 2 mode	int	826	
Relay 1 pulse duration	int	821	
Relay 2 pulse duration	int	827	0 ... 9999 (x 0.1 s)
Alarm parameter of relay 1	int	822	3: Upper current alarm (I_{--H}) 11: Upper frequency alarm (F_{--H}) 12: Alarm when Digital 1 input is connected (dI_{IH}) 13: Alarm when Digital 2 input is connected (dI_{2H}) 19: Lower current alarm (I_{--L}) 27: Lower frequency alarm (F_{--L}) 28: Alarm when Digital 1 input is disconnected (dI_{IL}) 29: Alarm when Digital 2 input is disconnected (dI_{2L})
Alarm parameter of relay 2	int	828	
Relay 1 connection delay	int	823	0 ... 9999 (x 0.1 s)
Relay 2 connection delay	int	829	
Relay 1 alarm value	int	824	0.000 ... 9.999 ⁽²⁾
Relay 2 alarm value	int	82A	0.00 ... 99.99 ⁽³⁾
Relay 1 hysteresis	int	825	0.000 ... 9.999 ⁽²⁾
Relay 2 hysteresis	int	82B	0.00 ... 99.99 ⁽³⁾

⁽²⁾ 0.000 ... 9.999 For alarm parameters: I_{--H} , I_{--L} , dI_{IH} , dI_{2H} , dI_{IL} y dI_{2L}

⁽³⁾ 0.00 ... 99.99 For alarm parameters: F_{--H} y F_{--L}

6.3.5.5. Configuration of the display

Table 20:Modbus memory map : Configuration of the display

Configuration of the display			
Variable	Format	Address	Valid data margin
Password	int	800	0000 ... 9999
Brightness of the display	int	801	0 ... 4
Light alarm	int	805	300 ... 1200 (x 0.1%)

7.- TECHNICAL FEATURES

AC Power supply ⁽⁴⁾	
Rated voltage	80 ... 270 V ~
Frequency	50 / 60 Hz
Consumption	2.6 ... 4.9 VA
Installation category	CAT III 300 V

DC Power supply ⁽⁴⁾		
Rated voltage	80 ... 270 V ==	18 ... 36 V ==
Consumption	1.5 ... 1.6 W	1.2 W
Installation category	CAT III 300 V	

⁽⁴⁾ Depending on model :

Model	Power supply		
	80 ... 270 V ~	80 ... 270 V ==	18 ... 36 V ==
M22358	✓	✓	-
M223580030000	-	-	✓

Current measurement circuit	
Nominal current (In)	1 A ~ / 5 A ~
Frequency measurement margin	45 ... 65 Hz
Overload	1.2 In continuous, 10 In Instantaneous (5s)
Consumption	< 0.2 VA
Impedance	< 20 mΩ
Installation category	CAT III 300V

Measurement accuracy	
Current measurement	0.5%

Relays outputs	
Quantity	2
Contact capacity (resistive)	CA: 5A / 250 V~ , CC: 5A / 30 V ==
Max. voltage open contacts	277 V~
Maximum current	5 A ~
Maximum switching power	1385 VA
Electrical life (250 V~ / 5A)	1x10 ⁵
Mechanical life	5x10 ⁶

Digital inputs	
Quantity	2
Type	Potential free contact
Insulation	2000 V~
Maximum short-circuit current	3.3 mA ==
Maximum voltage in open circuit	17 V ==

Analog output	
Quantity	1
Maximum internal voltage	17 V ==
Linearity	0.5 %
Nominal output range	0-20 mA, 4-20 mA, 4-12-20 mA (Programmable)
Maximum load resistor	350 Ω

RS-485 communications			
Communications protocol			Modbus RTU
Baud rate			2400 - 4800 - 9600 - 19200 bps
Data bits			8
Stop bits			1 - 2
Parity			without, even, odd
User interface			
Display			LED 5 digits
Keyboard			4 keys
Environmental features			
Operating temperature			-40°C ... +70°C
Storage temperature			-40°C ... +85°C
Relative humidity			≤ 95%
Maximum altitude			2000 m
Protection degree			Front : IP54, Rear case: IP20
Pollution degree			2
Mechanical features			
Power supply and Measurement			
Terminals : 1, 2, 4, 5		≤ 1 mm ²	≤ 0.5 Nm
Analog output, Relay outputs, RS-485, Digital inputs			
Terminals : 15, 16, 28, 29, 31, 32, 58, 59, 70, 71, 72		≤ 2.5 mm ²	0.5 ... 0.6 Nm
Dimensions			Figure 22 (mm)
Weight			236 g.
Surround			pc + abs
Standards			
Electromagnetic compatibility (EMC) -- Part 4-2: Testing and measurement techniques - Electrostatic discharge immunity test.			IEC 61000-4-2
Electromagnetic compatibility (EMC)- Part 4-3: Testing and measurement techniques- Radiated, radio-frequency, electromagnetic field immunity test			IEC 61000-4-3
Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test			IEC 61000-4-4
Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test			IEC 61000-4-5
Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields			IEC 61000-4-6
Safety requirements for electrical equipment for measurement, control and laboratory use -- Part 1: General requirements			IEC 61010-1

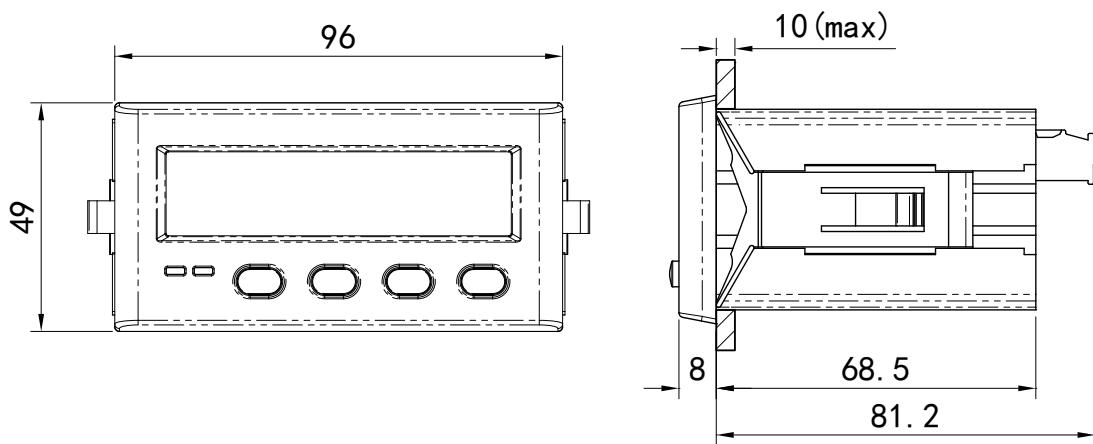


Figure 22: Dimensions of the DHC-96.

8.- MAINTENANCE AND TECHNICAL SERVICE

In the case of any query in relation to unit operation or malfunction, please contact the **CIRCUTOR, SA** Technical Support Service.

Technical Assistance Service

Vial Sant Jordi, s/n, 08232 - Viladecavalls (Barcelona)

Tel: 902 449 459 (España) / +34 937 452 919 (outside of Spain)

email: sat@circutor.es

9.- GUARANTEE

CIRCUTOR guarantees its products against any manufacturing defect for two years after the delivery of the units.

CIRCUTOR will repair or replace any defective factory product returned during the guarantee period.



- No returns will be accepted and no unit will be repaired or replaced if it is not accompanied by a report indicating the defect detected or the reason for the return.
- The guarantee will be void if the units has been improperly used or the storage, installation and maintenance instructions listed in this manual have not been followed. "Improper usage" is defined as any operating or storage condition contrary to the national electrical code or that surpasses the limits indicated in the technical and environmental features of this manual.
- **CIRCUTOR** accepts no liability due to the possible damage to the unit or other parts of the installation, nor will it cover any possible sanctions derived from a possible failure, improper installation or "improper usage" of the unit. Consequently, this guarantee does not apply to failures occurring in the following cases:
 - Overvoltages and/or electrical disturbances in the supply;
 - Water, if the product does not have the appropriate IP classification;
 - Poor ventilation and/or excessive temperatures;
 - Improper installation and/or lack of maintenance;
 - Buyer repairs or modifications without the manufacturer's authorisation.

10.- CE CERTIFICATE

CIRCUTOR, S.A. – Vial Sant Jordi, s/n
08232 Viladecavalls (Barcelona) Spain
(+34) 937 452 900 – info@circutor.com

EU DECLARATION OF CONFORMITY		DÉCLARATION UE DE CONFORMITÉ	
This declaration of conformity is issued under the sole responsibility of CIRCUTOR with registered address at Vial Sant Jordi, s/n – 08232 Viladecavalls (Barcelona) Spain		La présente déclaration de conformité est délivrée sous la responsabilité exclusive de CIRCUTOR dont l'adresse postale est: Vial Sant Jordi, s/n – 08232 Viladecavalls (Barcelone) Espagne	
Product:	Digital multimeter	Product:	Instrumentation numérique
Series:	DHC-96	Série:	DHC-96
Brand:	CIRCUTOR	Marque:	CIRCUTOR
Marca:	CIRCUTOR	L'objet de la déclaration est conforme à la législation d'harmonisation pertinente dans l'UE, à condition d'avoir été installé, entretenu et utilisé dans l'application pour laquelle il a été fabriqué, conformément aux normes d'installation applicables et aux instructions du fabricant	The object of the declaration is in conformity with the relevant EU harmonisation legislation, provided that it is installed, maintained and used for the application for which it was manufactured, in accordance with the applicable installation standards and the manufacturer's instructions
2014/35/UE: Low Voltage Directive 2014/30/EU: Electromagnetic Compatibility Directive 2011/65/UE: RoHS2 Directive 2011/65/UE: RoHS2 Directive		2014/30/UE: Electromagnetic Compatibility Directive 2011/65/UE: Low Voltage Directive 2011/65/UE: RoHS2 Directive	
Está en conformidad con la(s) siguiente(s) norma(s) u otro(s) documento(s) normativo(s);		Il est en conformité avec la(les) suivante (s) norme(s) ou autre(s) document(s) réglementaire (s):	
IEC 61010-1:2010/AMD1:2016 CSV Ed 3.0	IEC 61000-6-2:2016 Ed 3.0	IEC 61000-6-2:2016 Ed 3.0	IEC 61000-6-2:2016 Ed 3.0
IEC 61000-6-4:2006/AMD1:2010 CSV Ed 2.1		IEC 61000-6-4:2006/AMD1:2010 CSV Ed 2.1	
Año de marcado "CE":	2019	Year of CE mark:	2019
Année de marquage « CE »:			
Vila-decavalls (Spain), 10/01/2019 General Manager: Ferran Gil Torne			

CIRCUTOR, SA – Vial Sant Jordi, s/n
08232 Viladecavalls (Barcelona) Spain
(+34) 937 452 900 – info@circutor.com



KONFORMITÄTSERKLÄRUNG UE

Vorliegende Konformitätserklärung wird unter alleiniger Verantwortung von CIRCUTOR mit der Anschrift, Vial Sant Jordi, s/n – 08232 Viladecavalls (Barcelona) Spanien, ausgestellt

Produkt:

Digitale Messgeräte

Serie:

DHC-96

Marke:

CIRCUTOR

Der Gegenstand der Konformitätserklärung ist konform mit der geltenden Gesetzgebung zur Harmonisierung der EU, sofern die Installation, Wartung und Verwendung der Anwendung seinem Verwendungszweck entsprechend gemäß den geltenden Installationsstandards und der Vorgaben des Herstellers erfolgt.

2014/35/UE: Low Voltage Directive 2014/30/UE: Electromagnetic Compatibility Directive 2011/65/UE: RoHS2 Directive

Es besteht Konformität mit der/den folgender/folgenden sonstigen/sonstiger Regelwerk/Regelwerken

IEC 61000-1:2010+A1:2016 CSV Ed 3.0 IEC 61000-6-2:2016 Ed 3.0
IEC 61000-4-2:2006+A1:2010 CSV Ed 2.1

Jahr der CE-Kennzeichnung:

2019

DECLARAÇÃO DA UE DE CONFORMIDADE

A presente declaração de conformidade é expedida sob a exclusiva responsabilidade da CIRCUTOR com morada em Vial Sant Jordi, s/n – 08232 Viladecavalls (Barcelona) Espanha

Produto:

Instrumentação digital

Série:

DHC-96

Marca:

CIRCUTOR

O objeto da declaração está conforme a legislação de harmonização pertinente na UE, sempre que seja instalado, mantido e utilizado na aplicação para a qual foi fabricado, de acordo com as normas de instalação aplicáveis e as instruções do fabricante.

2014/35/UE: Low Voltage Directive 2014/30/UE: Electromagnetic Compatibility Directive 2011/65/UE: RoHS2 Directive

Está em conformidade com a(s) seguinte(s) norma(s) ou outro(s) documento(s) normativo(s):

IEC 61000-1:2010+A1:2016 CSV Ed 3.0 IEC 61000-6-2:2016 Ed 3.0
IEC 61000-4-2:2006+A1:2010 CSV Ed 2.1

È conforme alle seguenti normative o altri documenti normativi:

IEC 61000-1:2010+A1:2016 CSV Ed 3.0 IEC 61000-6-2:2016 Ed 3.0
IEC 61000-4-2:2006+A1:2010 CSV Ed 2.1

Anno di marcatura "CE":

2019

Anno di marcatura "CE":

2019

General Manager: Ferran Gil Torné

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, S.A.

NIF: A-08513178
Vial Sant Jordi, s/n.
08232 VILADECAVALLS
(Barcelona) Spain
Tel.: (+34) 93 745 29 00

CIRCUTOR, SA – Vial Sant Jordi, s/n
08232 Viladecavalls (Barcelona) Spain
(+34) 937 452 900 – info@circutor.com



Viladecavalls (Spain), 10/01/2019
General Manager: Ferran Gil Torné



DEKLARACJA ZGODNOŚCI UE

Niniejsza deklaracja zgodności zostaje wydana na wyłączną odpowiedzialność firmy CIRCUTOR z siedzibą pod adresem: Vial Sant Jordi, s/n – 08232 Viladecavalls (Barcelona) Hiszpania

produk:

Przyrządy cyfrowe

Seria:

DHC-96

marka:

CIRCUTOR

Przedmiot deklaracji jest zgodny z jednym lub więcej normami prawa europejskiego, harmonizowanego w Unii Europejskiej pod warunkiem, że będzie instalowany, konserwowany i użytkowany zgodnie z przeznaczeniem, dla którego został wyprowadkowany, zgodnie z małymi zastosowaniem normami dotyczącymi instalacji oraz instrukcjami producenta

2014/35/UE: Low Voltage Directive 2014/30/UE: Electromagnetic Compatibility Directive

2011/65/UE: RoHS2 Directive

Jest zgodny z następującymi normami(l) lub innym(i) dokumentem(ami) normatywnym(i):

IEC 61010-1:2010/AMD1:2016/CSV Ed 3.0 IEC 61000-6-2:2016 Ed 3.0
IEC 61000-6-4:2006/AMD1:2010 CSV Ed 2.1

Rok oznakowania "CE": 2019

ANNEX A.- CONFIGURATION MENU

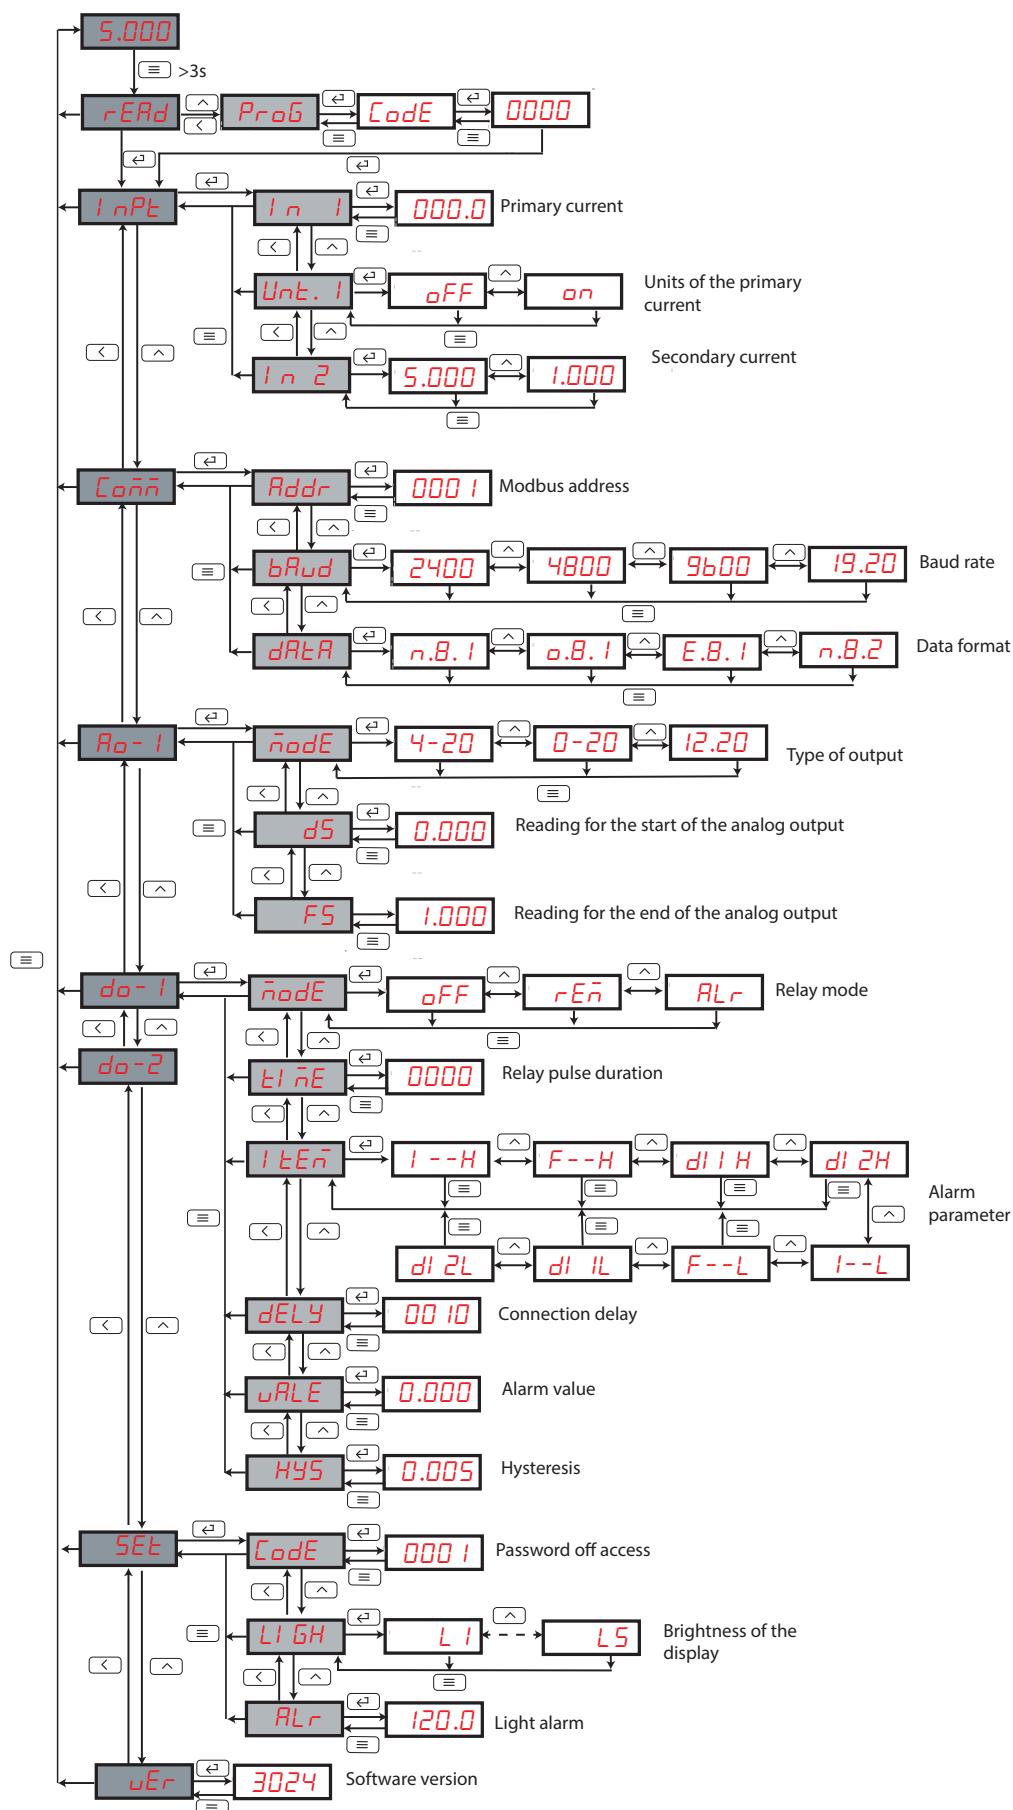


Figure 23: Configuration menu DHC-96 Aac

CIRCUTOR, SA

Vial Sant Jordi, s/n

08232 -Viladecavalls (Barcelona)

Tel.: (+34) 93 745 29 00 - Fax: (+34) 93 745 29 14

www.circutor.com central@circutor.com